



01 | SOFT CLOSE INSTALLATION - ENGAGE SOFT CLOSE / SOFT OPEN CATCHES

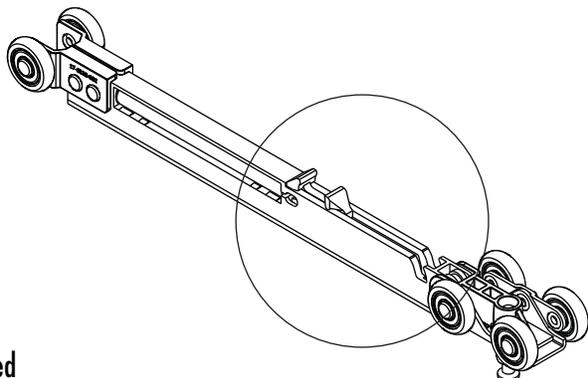

Make sure that each of the soft close / soft open catches are in the engaged position. The spring triggers must be adjacent to the 4 wheel hanger.


P/N SCF6320 - 4WBB2040

Not Engaged

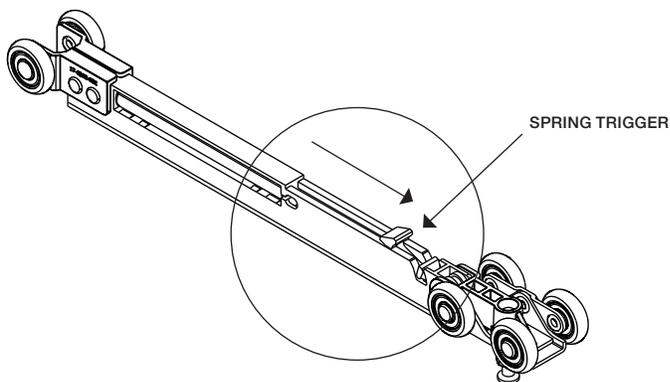

Engaged


02 | SOFT CLOSE INSTALLATION - INSERT SOFT CLOSE / SOFT OPEN TROLLEY ASSEMBLY

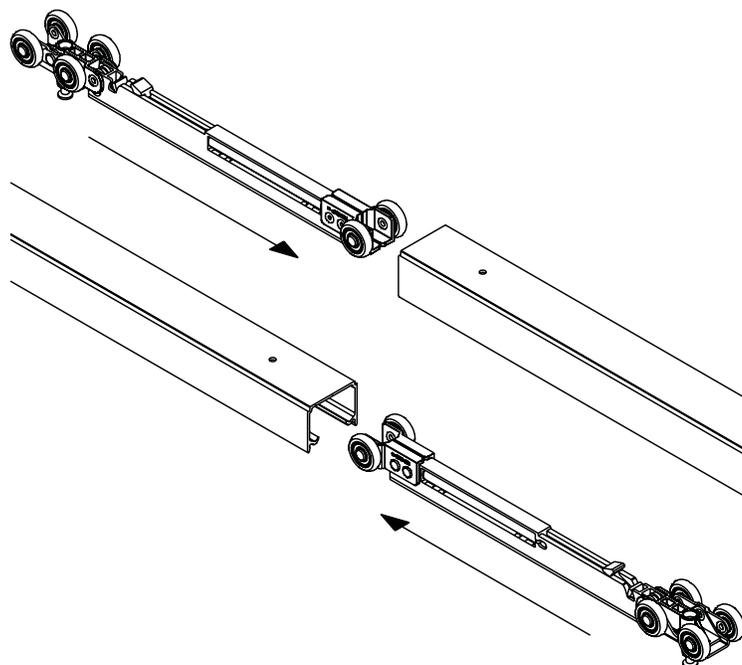

Insert each of the engaged soft close / soft open trolley assemblies into the ends of the top track. Ensure that the 4 wheel roller is closest to the outside of the track.

P/N 28234 - 07200 - AL

03 | SOFT CLOSE INSTALLATION - INSERT SOFT CLOSE / SOFT OPEN TRIGGER STOPS

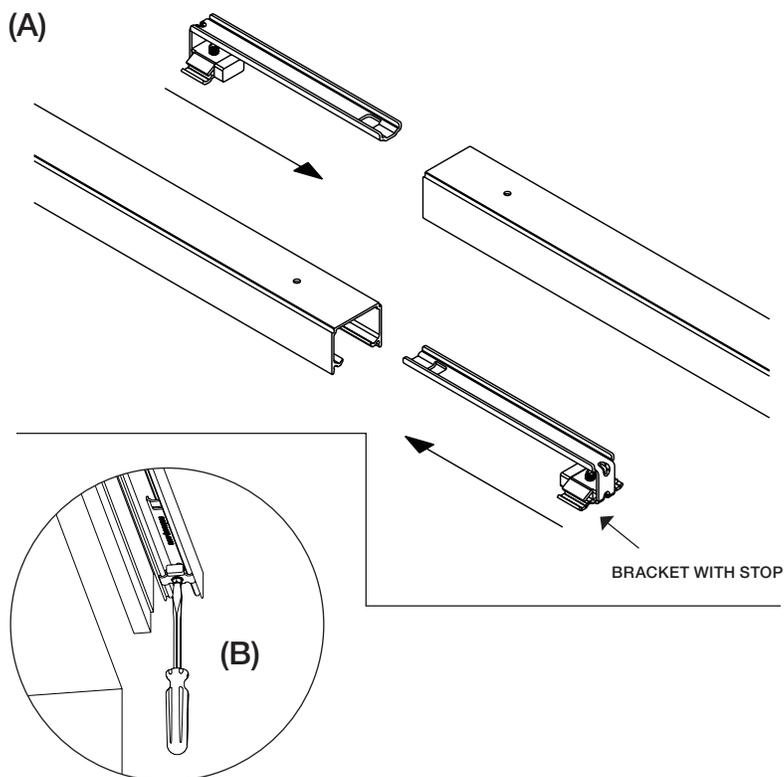

Insert each soft close trigger and stop (A) into the ends of the top track so that the stop engages the channel in the top track.

Secure the stop by tightening the set screw (B).

Trigger P/N SCT6320 - 007

NOTE;; Trigger may require final adjustment after door is installed.